
# **Cascade 52" Electric Fireplace**

### **Specifications Sheet**



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX52	1333 mm	514 mm	165 mm	1200 mm x 381 mm	5000	1829 mm
D1-B1X32	52 ½ in.	20 ¼ in.	6 ½ in.	47 ¼ in. x 15 in.	3000	72 in.

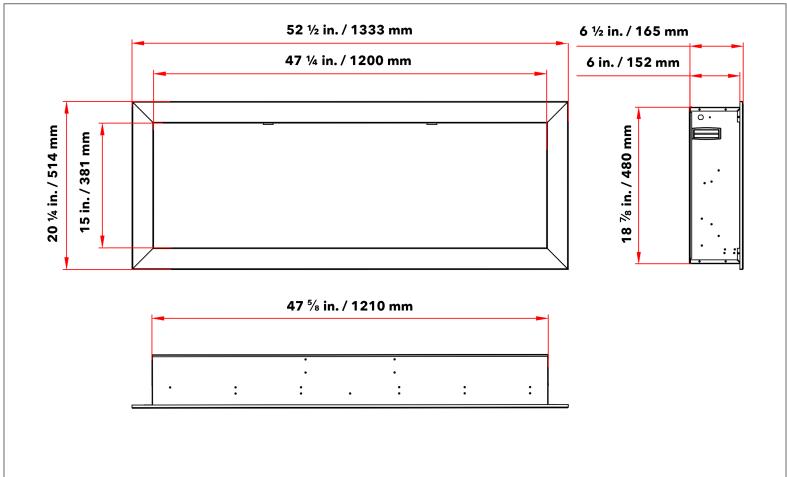

#### **Electrical Specifications**


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	32 W	1.5 W	Standard (type B)	CSA


## **Cascade 52" Electric Fireplace**

**Specifications Sheet** 




### **Clearances**

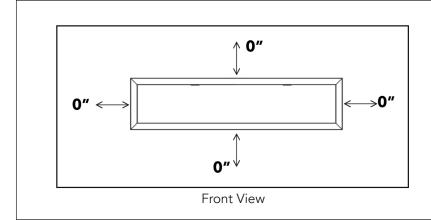



Minimum Clearances to Combustibles					
Тор	0"				
Sides	0"				
Back	0"				
Bottom 0"					
Front	36" / 0.9m				

### **Framing**

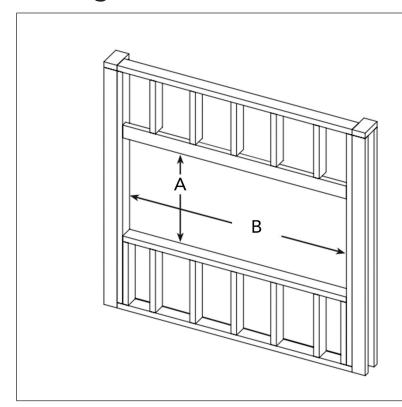

Framing Dimensions				
Α	19 ½ in.			
	495 mm			
В	48 ¾ in.			
Ь	1238 mm			
Depth	6 in.			
	153 mm			






# **Cascade 64" Electric Fireplace**

### **Specifications Sheet**



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX64	1638 mm	514 mm	165 mm	1505 mm x 381 mm	5000	1829 mm
01-01704	64 ½ in.	20 ¼ in.	6 ½ in.	59 ¼ in. x 15 in.	3000	72 in.

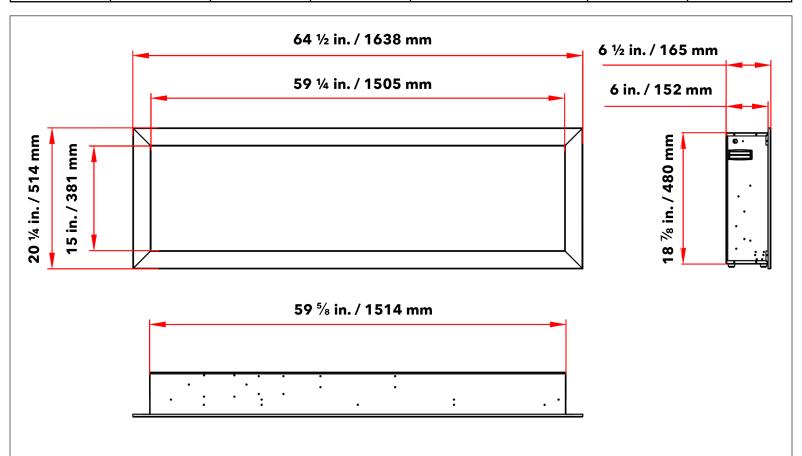

#### **Electrical Specifications**


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	34 W	1.5 W	Standard (type B)	CSA


# Cascade 64" Electric Fireplace

**Specifications Sheet** 




### **Clearances**

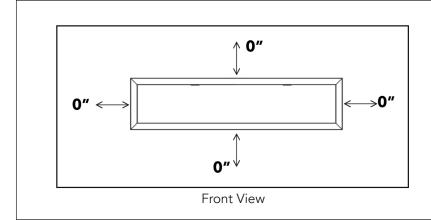



Minimum Clearances to Combustibles					
Тор	0"				
Sides	0"				
Back	0"				
Bottom 0"					
Front	36" / 0.9m				

### **Framing**

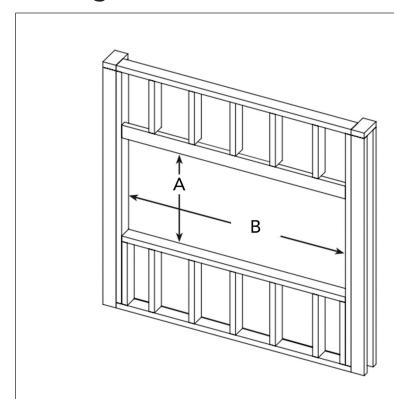

Framing Dimensions			
А	19 ½ in.		
A	495 mm		
В	60 ¾ in.		
Ь	1543 mm		
Donth	6 in.		
Depth	153 mm		





## **Cascade 74" Electric Fireplace**

1500 W

### **Specifications Sheet**


15A, 120V / 60Hz



Standard (type B)

**CSA** 

Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX74	1892 mm	514 mm	165 mm	1759 mm x 381 mm	5000	1829 mm
01-017/4	74 ½ in.	20 ¼ in.	6 ½ in.	69 ¼ in. x 15 in.	3000	72 in.

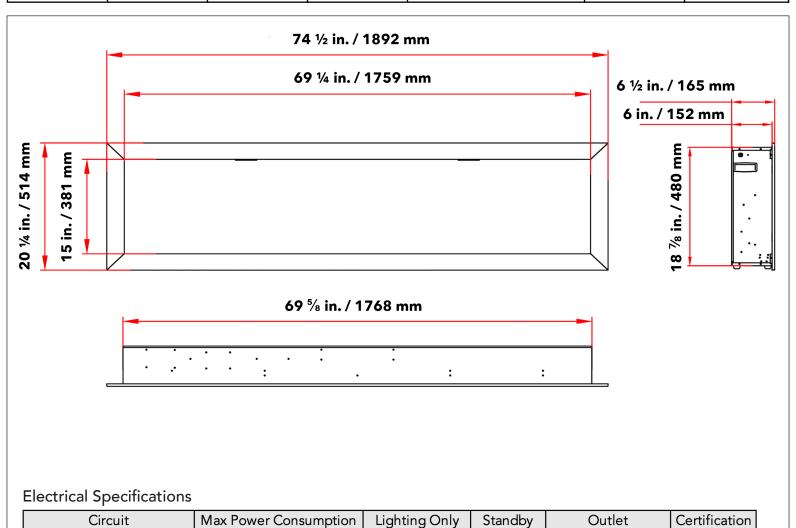

41 W


1.5 W


# Cascade 74" Electric Fireplace

**Specifications Sheet** 




### **Clearances**

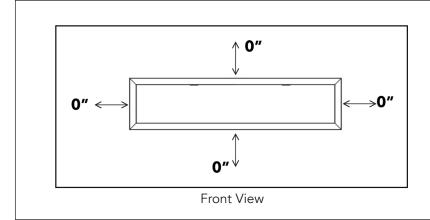



Minimum Clearances to Combustibles					
Тор	0"				
Sides	0"				
Back	0"				
Bottom 0"					
Front	36" / 0.9m				

### **Framing**

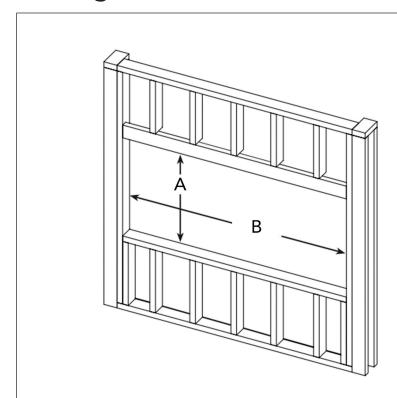

Framing Dimensions				
Α	19 ½ in.			
	495 mm			
В	70 ¾ in.			
Ь	1797 mm			
Depth	6 in.			
Debui	153 mm			






# **Cascade 82" Electric Fireplace**

### **Specifications Sheet**



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX82	2096 mm	514 mm	165 mm	1962 mmx 381 mm	5000	1829 mm
D1-D1X02	82 ½ in.	20 ¼ in.	6 ½ in.	77 ¼ in. x 15 in.	3000	72 in.

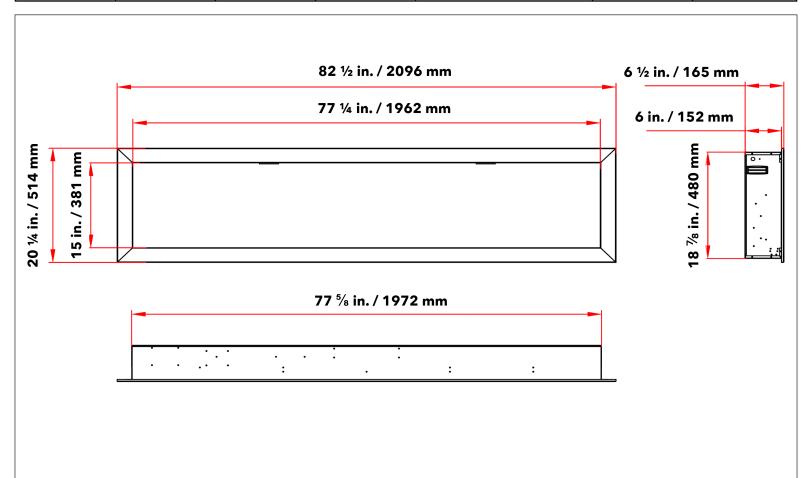

#### **Electrical Specifications**


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	46 W	1.5 W	Standard (type B)	CSA


## Cascade 82" Electric Fireplace

**Specifications Sheet** 




### **Clearances**

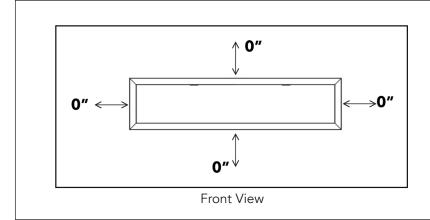



Minimum Clearances to Combustibles			
Тор	0"		
Sides	0"		
Back	0"		
Bottom	0"		
Front	36" / 0.9m		

### **Framing**

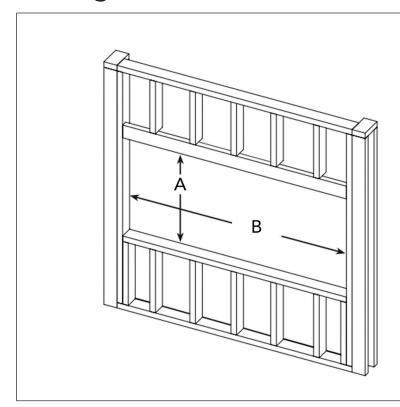

Framing Dimensions			
Д	19 ½ in.		
A	495 mm		
В	78 ½ in.		
D	1994 mm		
Donth	6 in.		
Depth	153 mm		



